

APPLICATION

Bench mounting

DETAILS

Waterflow around 39l/min
at 3 Bars pressure

Test pressure: 9 Bars/air

Max working pressure:
10 Bars

SURFACE PROTECTION

Epoxy powder coating
RAL 7035

MATERIALS

Brass

Handle in PP

HEADWORK SEALING

EPDM temperature
working range: 0-70°

CERAMIC temperature
working range: 0-70°

CONNECTION TAP

Male thread G1/2"

STANDARD AND NORMS

EN13792:2000

DIN12898

DIN12918


ISO228/1

OPTIONS

With Joystick handle
11068.2MDSJ

With ceramic 90°
headwork 11068.2MDSK

With chemical nickel
plating 17 microms inside
11068.2MDSNK

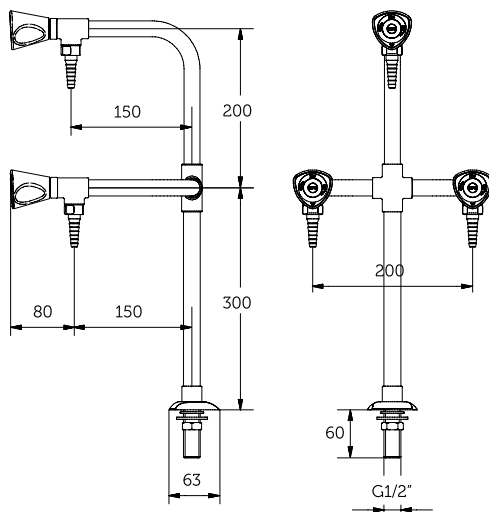

APPLICATION

Bench mounting

DETAILS

Waterflow around 39l/min
at 3 Bars pressure

Test pressure: 9 Bars/air

Max working pressure: 10 Bars

SURFACE PROTECTION

Epoxy powder coating
RAL 7035

MATERIALS

Brass

Handle in PP

HEADWORK SEALING

EPDM temperature
working range: 0-70°

CERAMIC temperature
working range: 0-70°

CONNECTION TAP

Male thread G1/2"

STANDARD AND NORMS

EN13792:2000

DIN12898

DIN12918

ISO228/1

OPTIONS

With Joystick handle
11069.2MDSJ

With ceramic 90° headwork
11069.2MDSC

With chemical nickel
plating 17 microns inside
11069.2MDSNK

