

**APPLICATION**

Bench mounting

**DETAILS**

Waterflow around 13l/min  
at 3 Bars pressure

Test pressure: 9 Bars/air

Max working pressure: 10 Bars

**CONTACT MATERIALS**

PP

Ceramic

**HEADWORK SEALING**

CERAMIC temperature  
working range: 0-50°

Headwork in PP with CERAMIC  
sealing without oil, grease  
and lubricants

**CONNECTION TAP**

Male thread G1/2"

J.G. for tube Ø10

**STANDARD AND NORMS**

EN13792:2000

DIN12898


DIN12918

ISO228/1

**OPTIONS**

Spout:

200 - 230 - 300 - 350 mm

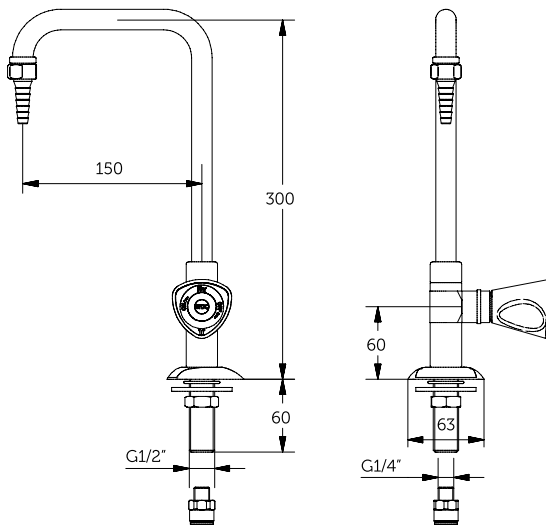

**APPLICATION**

Bench mounting

**DETAILS**

Waterflow around 13l/min  
at 3 Bars pressure

Test pressure: 9 Bars/air

Max working pressure: 10 Bars

**CONTACT MATERIALS**

PP

Ceramic

**HEADWORK SEALING**

CERAMIC temperature  
working range: 0-50°

Headwork in PP with CERAMIC  
sealing without oil, grease  
and lubricants

**CONNECTION TAP**

Male thread G1/2"

J.G. for tube Ø10

**STANDARD AND NORMS**

EN13792:2000

DIN12898

DIN12918


ISO228/1

**OPTIONS**

With "S" lower spout  
11070.2MDSPP

Spout:

200 - 300 - 350 mm

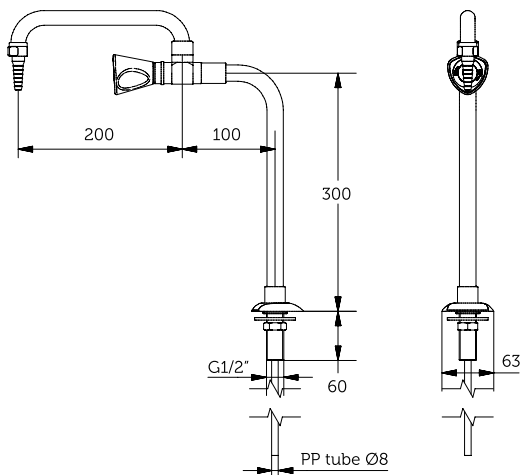

**APPLICATION**

Bench mounting

**DETAILS**

Waterflow around 13l/min  
at 3 Bars pressure

Test pressure: 9 Bars/air

Max working pressure: 10 Bars

**CONTACT MATERIALS**

PP

Ceramic

**HEADWORK SEALING**

CERAMIC temperature  
working range: 0-50°

Headwork in PP with CERAMIC  
sealing without oil, grease  
and lubricants

**CONNECTION TAP**

Male thread G1/2"

J.G. for tube Ø10

**STANDARD AND NORMS**

EN13792:2000

DIN12898

DIN12918

ISO228/1

**OPTIONS**

With J.G. 3/8" connector  
at the end of the tube  
11250.3MDSPJG

