

APPLICATION

Bench mounting

DETAILS

Waterflow around 26l/min
at 3 Bars pressure

Test pressure: 9 Bars/air

Max working pressure: 10 Bars

SURFACE PROTECTION

Epoxy powder coating
RAL 7035

MATERIALS

Brass

Handle in PP

HEADWORK SEALING

EPDM temperature
working range: 0-70°

CERAMIC temperature
working range: 0-70°

CONNECTION TAP

Flexibles with swivelling
nut F3/8"

STANDARD AND NORMS

EN13792:2000

DIN12898

DIN12918

ISO228/1

OPTIONS

Joystick handle 11081.0MDSJ


Ceramic headwork 90°
11081.0MDSC

With chemical nickel
plating 17 microns inside
11081.0MDSNK

Spout:

150 - 200 - 230

250 - 300 - 350 mm

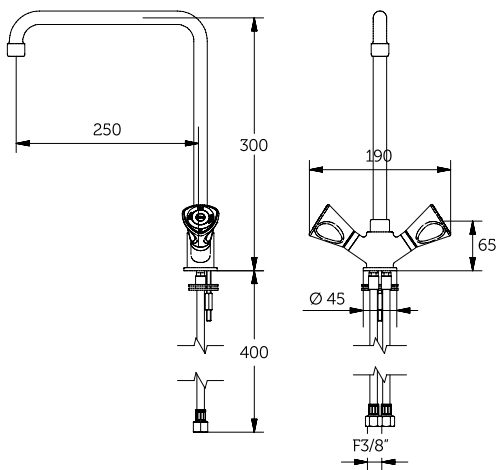

APPLICATION

Bench mounting

DETAILS

Waterflow around 26l/min
at 3 Bars pressure

Test pressure: 9 Bars/air

Max working pressure: 10 Bars

SURFACE PROTECTION

Epoxy powder coating
RAL 7035

MATERIALS

Brass

Handle in PP

HEADWORK SEALING

EPDM temperature
working range: 0-70°

CERAMIC temperature
working range: 0-70°

CONNECTION TAP

Flexibles F3/8"

STANDARD AND NORMS

EN13792:2000

DIN12898

DIN12918

ISO228/1

OPTIONS

Joystick handle 11081.GMDSJ


Ceramic headwork 90°
11081.GMDSC

With chemical nickel
plating 17 microns inside
11081.GMDSNK

Spout:

150 - 200 - 230

250 - 300 - 350 mm

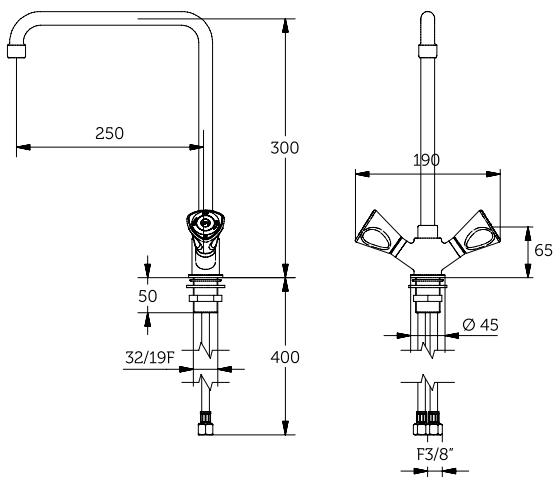

APPLICATION

Bench mounting

DETAILS

Waterflow around 26l/min
at 3 Bars pressure

Test pressure: 9 Bars/air

Max working pressure: 10 Bars

SURFACE PROTECTION

Epoxy powder coating
RAL 7035

MATERIALS

Brass

Handle in PP

HEADWORK SEALING

EPDM temperature
working range: 0-70°

CERAMIC temperature
working range: 0-70°

CONNECTION TAP

Flexibles F3/8"

STANDARD AND NORMS

EN13792:2000

DIN12898

DIN12918

ISO228/1

OPTIONS

Joystick handle 11082.0MDSJ

Ceramic headwork 90°
11082.0MDSC

With chemical nickel
plating 17 microns inside
11082.0MDSNK

Spout:

150 - 200 - 230

250 - 300 - 350 mm

