

APPLICATION

Wall mounting

DETAILS

Waterflow around 26l/min
at 3 Bars pressure

Test pressure: 9 Bars/air

Max working pressure:
10 Bars

SURFACE PROTECTION

Epoxy powder coating
RAL 7035

MATERIALS

Brass

Handle in PP

HEADWORK SEALING

EPDM temperature
working range: 0-70°

CERAMIC temperature
working range: 0-70°

CONNECTION TAP

Male thread G1/2"

STANDARD AND NORMS

EN13792:2000

DIN12898

DIN12918




ISO228/1

OPTIONS

Joystick handle 11014.2MDSJ

With ceramic headwork 90°
11014.2MDSC

With chemical nickel
plating 17 microns inside
11014.2MDSNK

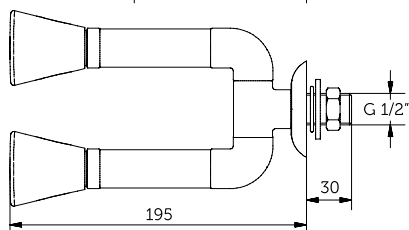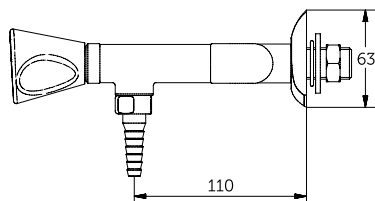

APPLICATION

Wall mounting

Vertical mounting

DETAILS

Waterflow around 26l/min
at 3 Bars pressure

Test pressure: 9 Bars/air

Max working pressure: 10 Bars

SURFACE PROTECTION

Epoxy powder coating
RAL 7035

MATERIALS

Brass

Handle in PP

HEADWORK SEALING

EPDM temperature
working range: 0-70°

CERAMIC temperature
working range: 0-70°

CONNECTION TAP

Male thread G1/2"

STANDARD AND NORMS

EN13792:2000

DIN12898

DIN12918

ISO228/1

OPTIONS

Joystick handle 11023.2MDSJ

With ceramic headwork
90° 11023.2MDSC

With chemical nickel
plating 17 microns inside
11023.2MDSNK

