

**APPLICATION**

Wall mounting

**DETAILS**

Waterflow around 34l/min  
at 3 Bars pressure

Test pressure: 9 Bars/air

Max working pressure:  
10 Bars

**SURFACE PROTECTION**

Epoxy powder coating  
RAL 7035

**MATERIALS**

Brass

Handle in PP

**HEADWORK SEALING**

EPDM temperature  
working range: 0-70°

CERAMIC temperature  
working range: 0-70°

**CONNECTION TAP**

Male thread G1/2"

**STANDARD AND NORMS**

EN13792:2000

DIN12898

DIN12918

ISO228/1

**OPTIONS**





Joystick handle  
11036.2MDSJ

Ceramic headwork 90°  
11036.2MDSC

With chemical nickel  
plating 17 microns inside  
11036.2MDSNK

Spout:

150 - 200 - 250  
300 - 350 mm

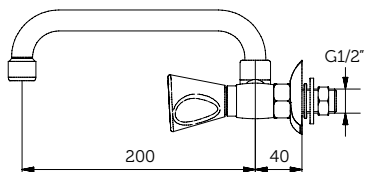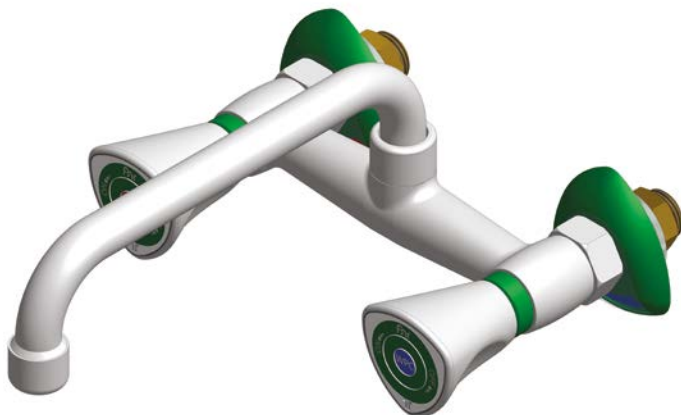

**APPLICATION**

Wall mounting

**DETAILS**

Waterflow around 34l/min  
at 3 Bars pressure

Test pressure: 9 Bars/air

Max working pressure: 10 Bars

**SURFACE PROTECTION**

Epoxy powder coating  
RAL 7035

**MATERIALS**

Brass

Handle in PP

**HEADWORK SEALING**

EPDM temperature  
working range: 0-70°

CERAMIC temperature  
working range: 0-70°

**CONNECTION TAP**

Male thread G1/2"

**STANDARD AND NORMS**

EN13792:2000

DIN12898

DIN12918

ISO228/1

**OPTIONS**

Joystick handle 11037.2MDSJ

Ceramic headwork 90°  
11037.2MDSC

With chemical nickel  
plating 17 microns inside  
11037.2MDSNK

Spout:

200 - 250

300 - 350 mm

